
# MD37 Body Camera Manual v1.1.1.1

Please read this instruction manual carefully before using the product. Thank you.

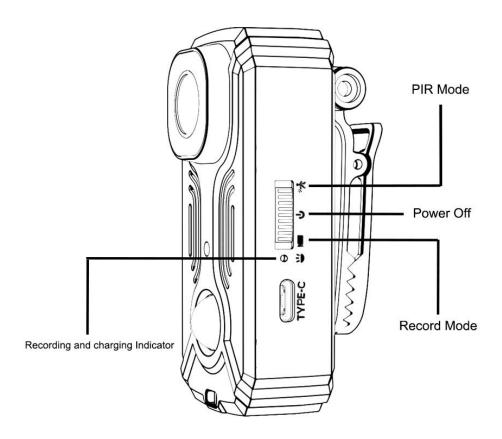


# Note:

- 1. Please insert the normal memory card (TF card) before using the device.
- 2.When the button is at the position or \*\*, the device is working status.If the device is

not used for a long time, please make the button is position(  $^{\circlearrowleft}$ ).

- 3.Only sound when playing the video, It is your player can't decode the video. You need to change it. You can try the player:VLC Media Player.
  - 4. During recording, the blue light flash.

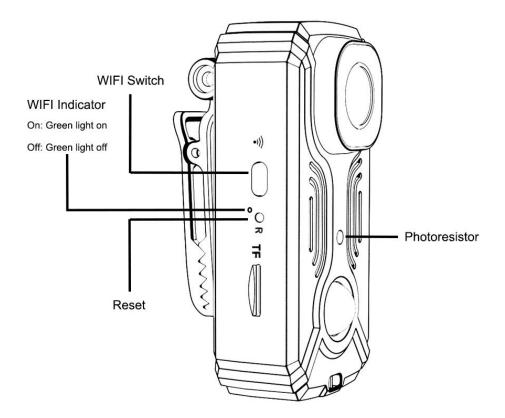

## Note:

Under PIR mode, WIFI can't be enabled.

# **One.Product operation:**

# 1. Charging

The device has built-in rechargeable lithium battery. When the device is low in power, please charge it by the following ways:

- 1). Connect the 5V charger;
- 2). Connect power bank;

#### Note:

When charging, pull the button to the middle position  $^{oldsymbol{U}}$  , Red light is on , when full, red light goes off.

When the button is at position or \*\*, the device will enter working mode, during which the indicator light cannot show the charging status.

Typically, the device requires about 5 hours to fully charge. Please use the charger 5V-1A or 5V-2A.

#### 2.Power on & Power off

Power on: When the button is pulled to position or \*\*, after 5 seconds , the device will boot into the recording.

Power off: Pull the button to the middle position  $\begin{tabular}{c} \begin{tabular}{c} \begin{tabular}{c}$ 

#### 3.Record Mode

Video: When the button is pulled to the position , the blue light will turn on. After 5 seconds, it will start recording, and the blue light will blink.

Save: While recording, the button is pulled to the position  $\,^{\,}$  $\!^{\,}$  $\!^{\,}$ , the blue light goes off, device saves recording and shuts down.

The video is automatically segmented and saved(one segment is 5 minutes), and the device supports loop recording.

#### 4. PIR Mode

Pull the button to the position \*\*, after 5 seconds ,the device turns on and enters the PIR mode. When switched to PIR mode, The device will first record a segment, then enter sleep mode.

Video: When someone appears within the sensing range, the device activates, the blue light flashes to start recording.

Save: About 60 seconds later, the blue lights goes off, the device saves the video, and enters the sleep mode under PIR mode.

Exit:Pull the button to the position 0, the device exits the PIR mode and shuts down.

Under PIR mode, each video segment is about 60 seconds.

The PIR effective distance is around about 4-5 Meters.

## 5.IR-infrared night vision

The infrared night vision function will automatically turn on or off according to the brightness of the device surrounding environment. Don't need to switch manually.

## 6.Record with charging

Connecting the charger or power bank, pull the button to the position or \*\*, the device will be turned on and boot into the working state.

Note: You can't record while connect to the computer.

## 7.Reset

The device crashes, the button is invalid, and it can't be used normally. You can click the reset button(  $\bf R$  ) to reset it.

## 8.Time Setting

Enable device WiFi, and after connecting with the mobile app, the time will synchronize.

## 9.Play Video

Device power off, connect to PC, pull the button to the position ...



Two: WIFI Hot spot Connection Instructions:


1. APP Download: Scan the QR code below to install, or search for "Viidure" on Google Play or the App Store to download and install.



## 2. WIFI Name VS Password:

WIFI Name: DV-MD37-XXXX, Password: 12345678

- 3. Activate WIFI Function: Ensure the device is powered on, then press or hold the WIFI button for 5 seconds until the green light blinks.
- 4. WIFI Hot spot Usage: Open your phone -> Settings -> WIFI, and search for DV-MD37-XXXX, Then enter the WIFI password. As shown in the image:

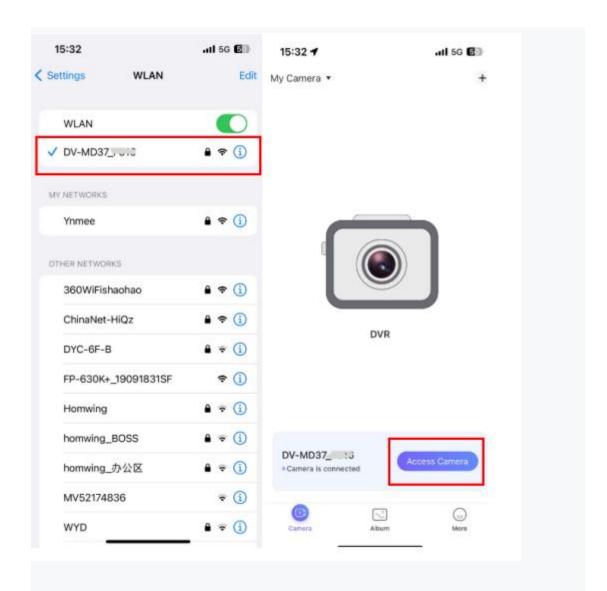

## Three:.Product parameters:

1) Video format: TS

2) Video resolution: 2560\*1440/1920\*1080P

3) Video frame rate: 30fps

4) Battery capacity: about 2000mAh

5) Video time: about 8 hours

6) Charging voltage: DC-5V 1A; DC-5V 2A

7) Storage support: 8-128GB8) Transmission speed: USB 2.0

9) Interface type: Type-C

10) Battery charging time:  $^{\sim}$ 5 hours (5V / 1A)

11) Working humidity: 15 ~ 85% RH9